CSF
RANGE



Contact Shock Freezers

B Medical Systems | CSF Range

Contact shock freezers are devices intended for the quick-freezing and subsequent temporary storage of blood plasma or biological samples to a core temperature below -30°C within less than one hour.

Compliant to AABB Standards | Medical Device according to MDR (EU) 2017/745, Class IIa or 21CFR Part 864.9700, Class II

2
MODELS

-30°C
TEMPERATURE

60 > 96
PLASMA BAGS
(350ml)

medical
systems

SAVING LIVES
THROUGH RELIABLE
AND INNOVATIVE
TECHNOLOGY

Blood Management Solutions

Safety Standards
B Medical Systems

The Safety Standards developed by B Medical Systems define certain significant technical features of a product. These ensure the safe storage of the preparations as well as setting the highest standards of safety for the user.

CSF RANGE	
●	B Medical Systems Electronics
●	B Medical Systems 7'' full touchscreen display
●	Power indicator light and digital temperature indicator (display: 0.1 digits)
●	Self-contained alarm system with integrated battery takes over the alarm function and temperature value measurements in case of system failure for at least 48 hours
●	Acoustic and visual alarm signal in case of temperature alarm and system failure
●	The alarm history function on the electronic stores all the relevant values during a temperature alarm, such as: min., max. and average temperature
●	Remote transmission alarm signal (via potential-free contact) in case of temperature alarm (change-over contact)
●	Designed and tested for climatic class SN (ambient temperature range +10°C to +32°C)
●	Interior made from stainless steel *[evaporator plates and drip channel made from stainless steel]*
●	Internal LED lighting
●	Additional remote transmission alarm signal (via potential-free contact) in case of system failure (change-over contact)
●	Smooth castors for optimum flexibility of movement
○	Water cooling *[standard for water-cooled version: CSF61W model]*
○	Machine compartment as external unit *[standard for split version: CSF61-101S models]*
●	Ambient temperature sensor
○	°B Connected - Universal software for the monitoring of refrigeration devices, including the acquisition, recording and visualization of temperature data
●	Ethernet interface for the visualization of all operating and control functions (hardware and software settings) via °B Connected monitoring software on a peripheral device (computer)
●	Battery operated emergency opening during the power failure

● Standard ○ Optional

Subject to change without prior notice.

Contact Shock Freezers

B Medical Systems | CSF Range

In conformity with national and international guidelines, regulations for Medical Devices offering reliability, efficiency and safety at an optimal price.

2 models • Compliant to **MDR (EU) 2017/745, Class IIa** | **AABB Standards**



Rapid plasma freezing

Our contact shock freezers provide a very short freezing cycle to a core temperature of -30°C: up to 96 units of 250 ml within less than 60 minutes.

State-of-the-art contact freezing technology™

Our innovative and patent pending system of inclined trays delivers homogeneous freezing and offers the repeatibility and productivity, with operator independent performance for performance consistancy.

Highest degree of ergonomics

Each tray has an effective and usable height, giving easier access for quicker loading and enabling easier manipulation of bags.



Optimized pull-down of the layers

The freezing down is quick, the clinical payback on investment is maximised and the concentration of factors VIII, IX and albumin is increased.

Integrated multifunction electronics

Located at eye level, the electronics are easily accessible and can be connected with our fully integrated monitored solutions for a complete traceability of frozen bags.



Maintenance-friendly design

- Our contact shock freezers offer an easy cleaning and disinfection facility
- Thanks to the additional battery, plates can still be opened to access the bags, in case of power failure

Contact shock freezers are devices intended for the quick-freezing and subsequent temporary storage of blood plasma or biological samples to a core temperature below -30°C within less than one hour. CSF models are built in compliance with directives for the preparation of blood plasma and offers multiple controls, warning and data recording safety features developed as a result of 40 years of expertise in refrigeration technology.

CSF models are available as air-cooled version (CSF61-101L), split version (CSF61-101S) and water-cooled version (CSF61-101W). Technical data available upon request.

Subject to change without prior notice. Some of the accessories shown in the pictures are optional.

CSF RANGE


Technical Data
General features





		CSF61L	CSF101L
Freezing capacity (plasma bags)	*Single layer*	20 at 1000ml (content 850ml)	32 at 1000ml (content 850ml)
		30 at 350ml (content 250ml)	48 at 350ml (content 250ml)
	Double layer	60 at 350ml (content 250ml)	96 at 350ml (content 250ml)
Freezing time to core temperature of -30°C *at +25°C ambient temperature (in single layer)*		20 units (1000ml) ± 45 min.	32 units (1000ml) ± 50 min.
		30 units (350ml) ± 26 min.	48 units (350ml) ± 26 min.
Operating temperature (preset)	*Pre-freezing*	-40°C	-40°C
	Freezing	-50°C	-50°C
	Eco-mode	-43°C	-43°C
Climate class (ambient temperature range)		SN (+10°C to +32°C)	
Defrosting technique		Hot gas	
Refrigerant type		R449A Exempted from (EU) 2024/573 under Regulation (EU) 2024/3122	
External dimensions H x W x D (mm)		1910 x 1080 x 830	1910 x 1500 x 830
Dimensions contact plates W x D (mm)		2 units of 680 x 630	2 units of 1110 x 630
Net weight with standard equipment (kg)		600	690

Energy Saver		CSF61L		CSF101L	
	Operating voltage range	380-400 V - 50/60 Hz (16A) or 480 V - 60 Hz (16A)		380-400 V - 50/60 Hz (16A) or 480 V - 60 Hz (16A)	
		STABLE RUNNING unloaded	FREEZING PROCESS - fully loaded (with units at 1000 / 350ml in single layer)	STABLE RUNNING unloaded	FREEZING PROCESS - fully loaded (with units at 1000 / 350ml in single layer)
	Power (W)	8200	4800 / 3500 (5700 at defrosting)	8200	6100 (6800 at defrosting)
	Energy consumption (kWh/24h)	0.7	3.0 / 1.8 (per freezing cycle)	0.8	4.5 / 2.5 (per freezing cycle)
	Average heat ejection (Kcal/h)	-	3397	-	7500
	Compressor running time (%)	-	90	-	95
	Noise level (dB(A)) *(at 1.6m height & 1m distance)*	73	73	75	75

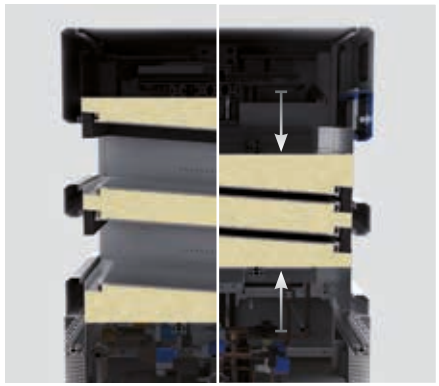

OPTIMIZED CONTACT FREEZING

- Levels operate independently, allowing simultaneous freezing and defrosting as necessary
- Inclined plates at 5° ensure full contact with plasma and minimizes effect of air trapped in bags negatively influencing repeatibility of freezing cycle times, providing operator independent performance for 100% performance consistency




Plate horizontal




Plate inclined at 5°

All values were measured at +25°C ambient temperature and without load (unless otherwise stated).
Subject to change without prior notice. Some of the accessories shown in the pictures are optional.
The figures are approximate, and may vary based on the number of bags that are actually stored and the different bag manufacturers' specifications available on the market, the actual bag sizes as well as the individual user's practice of loading.

CSF RANGE


Technical Data
Specifications

	CSF61L	CSF101L
Control/display sensor (4 sensors per device) *Precision (from -80°C to +180°C) ± 0.3°C*	PT1000 2-WIRE 1/3DIN CL.B	
Dummy bag sensor (optional) *Precision (from -80°C to +180°C) ± 0.3°C*	PT1000 2-WIRE 1/3DIN CL.B	
Accu data / function time of the control panel when system failure	12 V - 7 AH / 24h	
Relative humidity at +32°C	≤ 70%	
Compressor	Bitzer	
European Medical Device Regulation	MDR (EU) 2017/745, Class IIa	
EMC directive	2014 / 30 / EU	
Low voltage directive	2014 / 35 / EU	
FDA regulation | Medical Device	21CFR Part 864.9700, Class II	

EXAMPLE OF "FREEZING CYCLE ON CORE TEMPERATURE OF -30°C"


CSF61L

- Voltage: 400V / 50Hz
- Ambient temperature: +25°C
- Relative humidity: 45%
- Test bag type:
  350ml, filled with 250ml (30 bags)
  1000ml, filled with 850ml (20 bags)
- Filling medium:
  saline solution, 0.9% salt

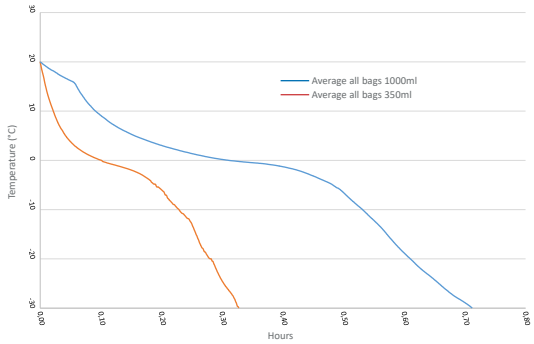

CSF101L

- Voltage: 400V / 50Hz
- Ambient temperature: +25°C
- Relative humidity: 45%
- Test bag type:
  350ml, filled with 250ml (48 bags)
  1000ml, filled with 850ml (32 bags)
- Filling medium:
  saline solution, 0.9% salt

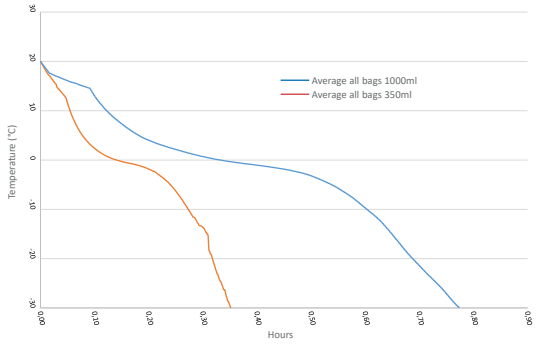

Subject to change without prior notice. Some of the accessories shown in the pictures are optional.

CSF RANGE



DUMMY / REFERENCE BAG
(Shown with sensor & cable)



TRANSPORT CARRIER



TRANSPORT TRAY



BARCODE READER

Equipment
Standard & optional

	CSF61L	CSF101L
B Medical Systems Electronics 7'' full touchscreen display	●	●
Internal LED lighting	●	●
°B Connected - Monitoring Software	○	○
Ethernet interface / interface card	●	●
Ambient temperature sensor	●	●
Potential-free contact in case of system failure	●	●
Eco-mode (interim storage temperature of -43°C)	●	●
Dummy / reference bag port for accompanying core temperature readings during the freezing process	● 2	● 2
Dummy / reference bag with sensor & cable	○	○
Dummy / reference bag	○ 500ml	○ 500ml
Transport carrier | tray	○ 1 | ○ 4 (recommended)	○ 1 | ○ 4 (recommended)
Barcode reader	○	○
Condenser filter	●	●
Integrated air-cooled condenser	●	●
Water cooling	○ | ● CSF61W (water-cooled version)	○ | ● CSF101W (water-cooled version)
Air-cooled condenser & compressor as external unit (1080 x 1350 x 965 mm)	○ | ● CSF61S (split version)	○ | ● CSF101S (split version)
Securing feet for models with condenser & compressor as external unit	○	○
Smooth castors with stabilizers	●	●
Wooden packaging for ocean transport / export	●	●



EXTERNAL AIR COOLING SYSTEM

INSTALLATION INSTRUCTIONS

The installation costs for units with an external air cooling system or water-cooled system are not included in the unit price (standard version: CSF61-101L). These costs are subject to an individual client request and can vary depending on the conditions in the designated building. CSF models are installed as a free-standing, air-cooled unit ready for connection.

On request the CSF models can also be equipped with the following cooling systems:

- External air cooling system (CSF61S model)
- Water cooling system (CSF61-101W models)
  - Directly connected to the in-house water system
  - Connected to a separate closed air-conditioning system, also called "A/C water cooling system"
  - Connected to a separate closed water circuit, also called "refrigerated water tower"

● Standard ○ Optional - Not available


Subject to change without prior notice. Some of the accessories shown in the pictures are optional.

Full functionalities at a glance

B Medical Systems | Electronics

The B Medical Systems Electronics
offers a wide range of adjustment and diagnostic facilities as well as additional protection / warning operations (via external alarm operations, histories and individual display signals).

Multi-function electronics with 7'' full touchscreen display, located at eye level with pre-installed connection allowing exclusive °B Connected monitoring functionalities for a complete traceability of frozen bags.



Power switch OFF / ON

Turn main switch to ON position, the controller will be switched on automatically and the green LED lights up and the display activates.



Touchscreen 7'' full display

The main screen has two different shapes depending on whether the batch management is active or not:

- At the top: login status (user level), current time and current voltage
- In the left-hand: the main screen shall always show two frames containing level specific data (operating mode, plate temperatures, dummy bag temperature, process time and progress bar). The entire frame and its content is an active touch area. When pressed, the selected level opens in detail view. The other level goes to minimized view
- In the right-hand: touch buttons to access batch list and main menu, to deactivate touch screen for cleaning, to mute alarm buzzer and to access active alarms and warnings. When the batch management is inactive, the batch list button is replaced by two moving direction selection button (open/close plates)






Modern and user-friendly graphic display

Acoustic and visual alarm signal

When an alarm occurs, the red alarm LED lights up and an acoustic signal sounds. The corresponding alarm message appears overall or level specific on the display. If several alarms occur simultaneously, the messages will be shown alternately.



Keycard reader

Login using an NFC card

Touch buttons

- CLEAN button: the cleaning button allows the user to disable the touch capability of the screen for a short period of time in order to clean the screen. This button is replaced by the logout button when any user is logged in
- MENU button: allows access to the menu screen
- MUTE button: deactivates the acoustic alarm for a predefined period of time
- ACTIVE ALARMS AND WARNINGS button: during a warning or alarm situation, the color of this button and the corresponding level will change. Information on an active alarm and warning is accessible by pressing the message button



Subject to change without prior notice.

Optimum control and protection

B Medical Systems | °B Connected



°B CONNECTED | MONITORING SOFTWARE

Universal software for the monitoring of refrigeration devices, including the acquisition, recording and visualization of temperature data.

- Unique monitoring software for the full range of Blood Management Solutions and Medical Refrigeration products
- Web-based interfaces for computers and mobile devices
- Modern design for simple and intuitive use
- Graphic display of temperature curves
- Integrated event and activity history of appliances' components
- Data recording on centralized database for long-term archiving
- Easy setting of specific alarm, via email or SMS alerts
- Generation of reports compiling crucial data and activities
- Temperature and detailed device data export for third-party software
- Important cost advantage compared to a traditional circular chart recorder and its spare parts
- REST API to access raw data directly from the database in read-only mode

KEY BENEFITS:

- Unique interface for the monitoring of the full range of refrigeration devices
- Centralized database providing data access to entire customer network

1 CONFIGURATION




USER MANAGEMENT

- Password login
- Access right



DEVICE SETTINGS

- Device information
- Device & user configuration



ALARM PROFILE

- Parameters of the alarm profile (day, hour, minute)
- Alarm management

2 DISPLAYING



DETAILED DISPLAY

- Optimized design for mobile and touch compatible devices
- Support of multiple languages
- Real-time data: Current temperatures, set point, upper and lower limit, door state, compressor runtime
- Log data: Events, alarms within date/time, event type, description of the event. Event and alarm confirmation function
- Parameter settings of each device: Factory settings, real-time clock, language, firmware version, RS485 address, IP address
- Batch management: Plasma bag barcodes scanned on device and imported in the database

°B CONNECTED
For optimum control and protection of your preparations

Subject to change without prior notice.

°B Connected offer a highly flexible system that is adaptable to specific customer requirements
> Complete & legally safe documentation of temperature data
> Comprehensive applications and diagnostic possibilities

3 ANALYSING



REAL TIME GRAPHICS

- Graphic temperature progress (in real time)
- Adjustable time axis
- Offline navigation



INTERACTIVE ANALYSIS


- No limitation in terms of time range
- Freely scalable
- Detailed information for any point of time
- Temperature data, events and alarms
- Login history and audit trails



CONTROL CENTER

Overview (Control Monitor) of all monitored appliances:

- Information regarding status, appliance name, location, connection, upper and lower limits, current temperature, events / alarms
- Dashboard to combine several temperature measurements in one single graph



PRINTED ANALYSIS

- Customizable print reports on daily, weekly and monthly basis
- Exports in various file types
- Standardized format

Subject to change without prior notice.

Blood Management Solutions

Safe global blood management: from collection to transfusion, transportation, processing and storage

Vaccine Cold Chain

Reliable solutions for safe vaccination around the world

Medical Refrigeration

State-of-the-art technology for the exacting needs of the medical world

Our Global Expertise

After Sales support and service

We strive to provide you with the highest standards of service; not only through our selected distributors and partners for all your maintenance and service but also our second line trouble shooting and after sales service. This factory-based group of engineers is there to help our partners and yourself to get the best solution for your cold storage needs.


B medical systems

SAVING LIVES THROUGH RELIABLE AND INNOVATIVE TECHNOLOGY

B Medical Systems (formerly Dometic Medical Systems) has more than 40 years' experience in the medical refrigeration sector.

The company, formerly known as Electrolux Medical Systems, was founded in 1979 when the World Health Organization approached Electrolux in Vianden, Luxembourg, to create a solution for the safe storage and transport of vaccines around the world. In 2001, Electrolux Medical Systems became part of the Dometic Group, and was renamed Dometic Medical Systems. In 2015 after MBO, the company was named B Medical Systems.

Luxembourg, in the heart of Europe

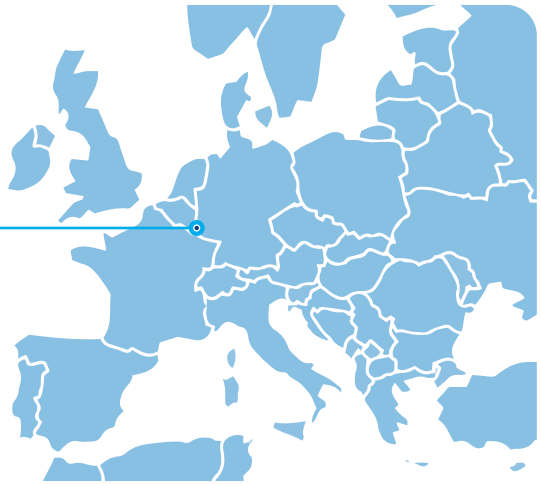

B Medical Systems S.à r.l.

17, op der Hei
L - 9809 Hosingen, Luxembourg

Tel.: (+352) 92 07 31-1
info@bmedicalsystems.com

MADE IN LUXEMBOURG

www.bmedicalsystems.com

WE SUPPORT UN GLOBAL COMPACT

Since 2019 B Medical Systems has been committed to the UN Global Compact corporate responsibility initiative and its principles in the areas of human rights, labour, the environment and anti-corruption.

B MEDICAL SYSTEMS; the °B logo; Ultra SDD and Saving lives through reliable and innovative technology; are trademarks of B Medical Systems S.à r.l. | B Medical Systems products are protected by granted and pending patents and registered designs. All rights reserved. All indications without guarantee and excluding all liability due to faulty, incomplete or outdated information. All technical data subject to change without prior notice.

BR_LUX_BMS_CSF__EN_ED092026